

Product datasheet

Specifications



Harmony. Modular timing relay. 8 A. 2 CO. 0.1 s...100 h. power on delay . 24 V DC / 24...240 V AC/ DC

RE22R2AMU

Price: 2,090.50 ZAR

Main

Range Of Product	Harmony Timer Relays
Product Or Component Type	Modular timing relay
Discrete Output Type	Relay
Device Short Name	RE22
Nominal Output Current	8 A

Complementary

Contacts Type And Composition	2 C/O timed contact
Time Delay Type	Power on-delay
Time Delay Range	1...10 min 10...100 h 1...10 s 0.1...1 s 6...60 s 6...60 min 1...10 h
Control Type	Rotary knob front panel
[Us] Rated Supply Voltage	24...240 V AC 24 V DC
Voltage Range	0.85...1.1 Us
Supply Frequency	50...60 Hz +/- 5 %
Connections - Terminals	Screw terminals, 2 x 1.5 mm ² with cable end Screw terminals, 2 x 2.5 mm ² without cable end
Tightening Torque	0.6...1 N.m conforming to IEC 60947-1
Housing Material	Self-extinguishing
Repeat Accuracy	+/- 0.5 % conforming to IEC 61812-1
Temperature Drift	+/- 0.05 %/°C
Voltage Drift	+/- 0.2 %/V
Setting Accuracy Of Time Delay	+/- 10 % of full scale at 25 °C conforming to IEC 61812-1
Control Signal Pulse Width	30 ms 100 ms under load
Insulation Resistance	100 MOhm at 500 V DC conforming to IEC 60664-1
Recovery Time	120 ms on de-energisation
Immunity To Microbreaks	10 ms
Power Consumption In Va	50 VA at 240 V AC

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Power Consumption In W	0.7 W at 24 V DC
Breaking Capacity	2000 VA
Minimum Switching Current	10 mA at 5 V
Maximum Switching Current	8 mA
Maximum Switching Voltage	250 V
Electrical Durability	100000 cycles for resistive load, 8 A at 250 V, AC
Mechanical Durability	10000000 cycles
Rated Impulse Withstand Voltage	5 kV for 1.2...50 µs conforming to IEC 60664-1 5 kV conforming to IEC 61812-1
Power On Delay	100 ms
Safety Reliability Data	MTTFd = 182.6 years B10d = 170000
Mounting Position	Any position in relation to normal vertical mounting plane
Mounting Support	35 mm DIN rail conforming to IEC 60715
Status Led	LED green (flashing) for timing in progress LED green (steady) for power ON LED yellow for relay energised
Function Available	A- Power on-delay relay-2 C/O At- Power on-delay relay w/ pause/summation (Y1)-2 C/O
Width	22.5 mm
Net Weight	0.09 kg
Control Type	With test button
Number Of Functions	2

Environment

Dielectric Strength	2.5 kV for 1 mA/1 minute at 50 Hz conforming to IEC 61812-1
Standards	IEC 61000-6-3 IEC 61000-6-4 IEC 61000-6-2 IEC 61812-1 IEC 61000-6-1
Directives	2004/108/EC - electromagnetic compatibility 2006/95/EC - low voltage directive
Product Certifications	cULus CE EAC CSA RCM CCC GL
Ambient Air Temperature For Operation	-20...60 °C
Ambient Air Temperature For Storage	-30...60 °C
Ip Degree Of Protection	IP40 housing: conforming to IEC 60529 IP20 terminal block: conforming to IEC 60529 IP40 front face: conforming to IEC 60529
Vibration Resistance	20 m/s ² (f= 10...150 Hz) conforming to IEC 60068-2-6
Shock Resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative Humidity	93 %, without condensation conforming to IEC 60068-2-30

Electromagnetic Compatibility	<p>Electrostatic discharge immunity test - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2</p> <p>Electrostatic discharge immunity test - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2</p> <p>Fast transients immunity test - test level: 1 kV level 3 (capacitive connecting clip) conforming to IEC 61000-4-4</p> <p>Fast transients immunity test - test level: 2 kV level 3 (direct contact) conforming to IEC 61000-4-4</p> <p>Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5</p> <p>Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5</p> <p>Radiated radio-frequency electromagnetic field immunity test - test level: 10 V level 3 (0.15...80 MHz) conforming to IEC 61000-4-6</p> <p>Electromagnetic field immunity test - test level: 10 V/m level 3 (80 MHz...1 GHz) conforming to IEC 61000-4-3</p> <p>Immunity to microbreaks and voltage drops - test level: 30 % (500 ms) conforming to IEC 61000-4-11</p> <p>Immunity to microbreaks and voltage drops - test level: 100 % (20 ms) conforming to IEC 61000-4-11</p> <p>Conducted and radiated emissions class B conforming to EN 55022</p>
--------------------------------------	--

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.6 cm
Package 1 Width	8.2 cm
Package 1 Length	9.5 cm
Package 1 Weight	103.0 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	40
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	4.55 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)


China Rohs Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)

Circularity Profile [End of Life Information](#)


Dimensions Drawings

Dimensions

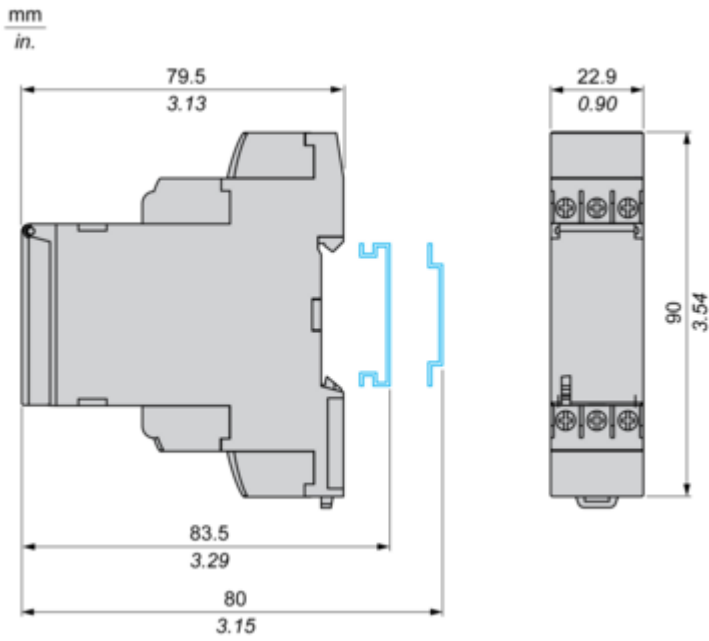


Connections and Schema

Internal Wiring Diagram

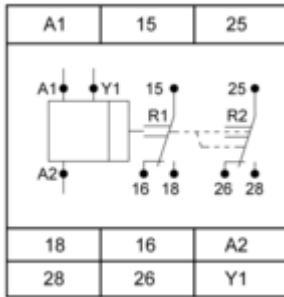

Wiring Diagram




Technical Description

Function A : Power on Delay Relay

Description

The timing period T begins on energization. After timing, the output(s) relay close(s).

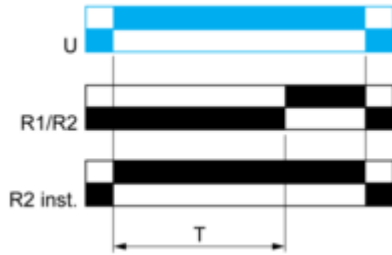


2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function At : Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact Y1 starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

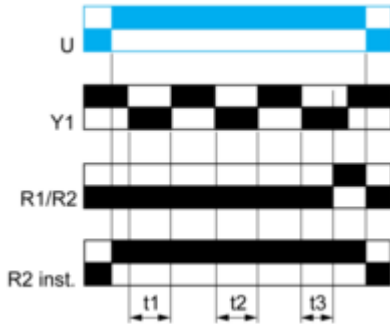

$T = t1+t2+t3$

Legend

- Relay de-energised
- Relay energised
- Output open
- Output closed

Y1 :	Control contact
R1/R2 :	2 timed outputs
R2 inst. :	The second output is instantaneous if the right position is selected
T :	Timing period
U :	Supply