


1 Black Shell

**Characteristics:**


- 1 It comprises of a axial fan, a protective housing on the front and rear surfaces and filter designed to retain dust particles.
- 2 The filters that equip the fans must be cleaned and replaced regularly.
- 3 It can produce all kinds of flame retardant V0 grade material and filter panel.
- 4 Material of filter pad: 100g/ M3 nylon fiber compound, Filtration efficiency up to 73%.
- 5 Operation Temperature/Humidity Range: (under unconcretionary state) -20°C ~ +70°C (temperature), 0% ~ 95% (himidity)
- 6 RAL 7035 grey is the standard offer with the possibility to change to RAL 7032 by means of a replacement grille.
- 7 Bear in mind the pressure losses caused by the outlet element (grille with filter, ventilation louvre or simple opening) when determining the fan flow rate.
- 8 Protection class: E N 60 5 29 I P 5 4 (not suitable for outdoor equipment).

1			
2			
3	V0		70 %
4	100g/ M3		
5	/	-20	~+70
6	RAL7035	RAL7032	
7			
8			
	E N 60 5 29 I P 5 4		

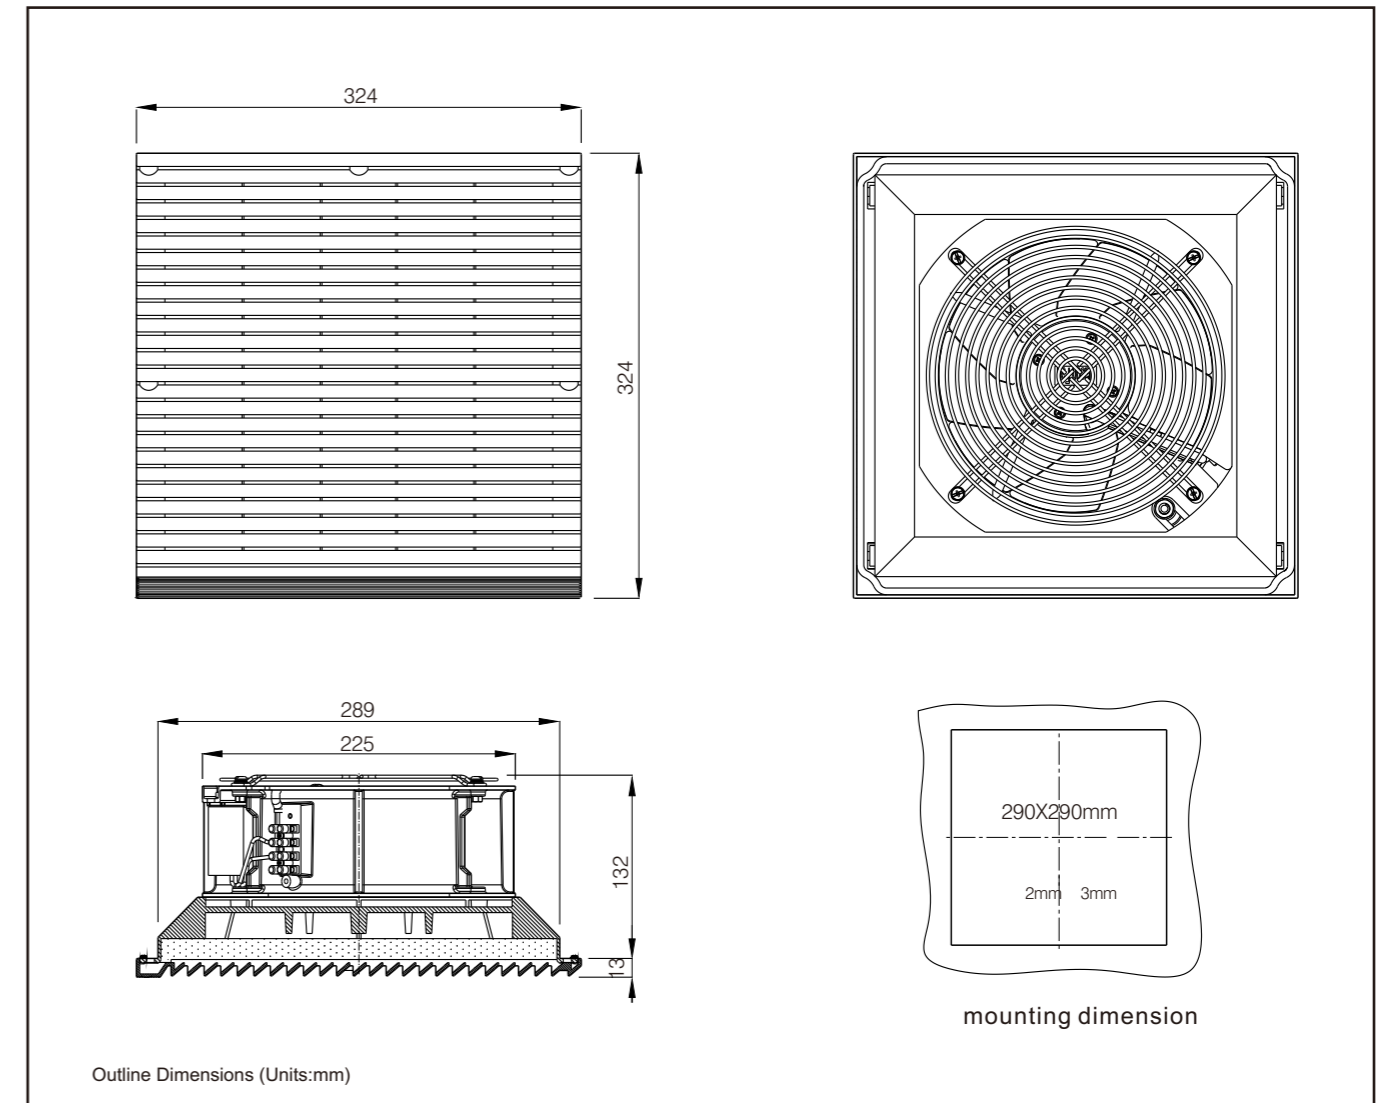

- A installation: No need of screw, snap-in installation
- B Power connection: Terminal connection
- C With seal ring
- D Maximum weight: 2.97kg

- A
- B
- C
- D

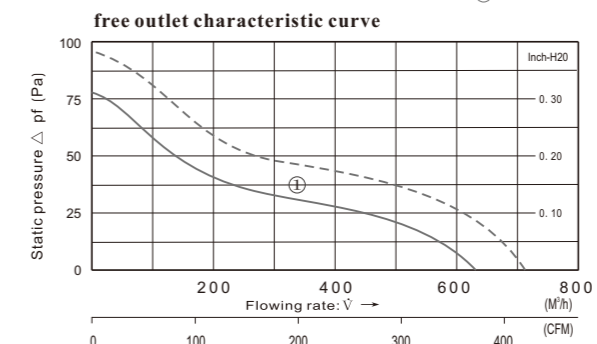

**Parameters**

Type	Fan Model	Rated Voltage	Speed	Frequency	current	Power	Max Air Flow	Static Pressure	Noise Curve	external dimensions
		V	V	Hz	(A)	(W) <sub>10% 20%</sub>	m3/h	(Pa)	(dB)	(mm)
FJK6626M115	FJ22081MAB	115 AC	75...125	50	0.60	65	637	78	55	① 324x322x145
				60	0.64	75	707	90	57	
FJK6626M230	FJ22082MAB	230 AC	150...250	50	0.30	65	637	78	55	
				60	0.34	77	707	90	57	
FJK6626M380	FJ22083MAB	380 AC	220...415	50	0.18	64	637	78	55	
				60	0.20	78	707	90	57	